


OPERATING YOUR SWING-AWAY – USING THE SAFETY LATCH

PULL SPRING LOADED PIN BACKWARDS TO EASILY REMOVE THE HITCH PIN. AFTER REINSTALLING THE HITCH PIN, RELEASE THE SPRING LOADED PIN TO SECURE HITCH PIN AND SWING-AWAY.



REALIGN LOCKING PIN BY CENTERING IT WITH THE HOUSING MAKING SURE THE HITCH PIN IS SECURE

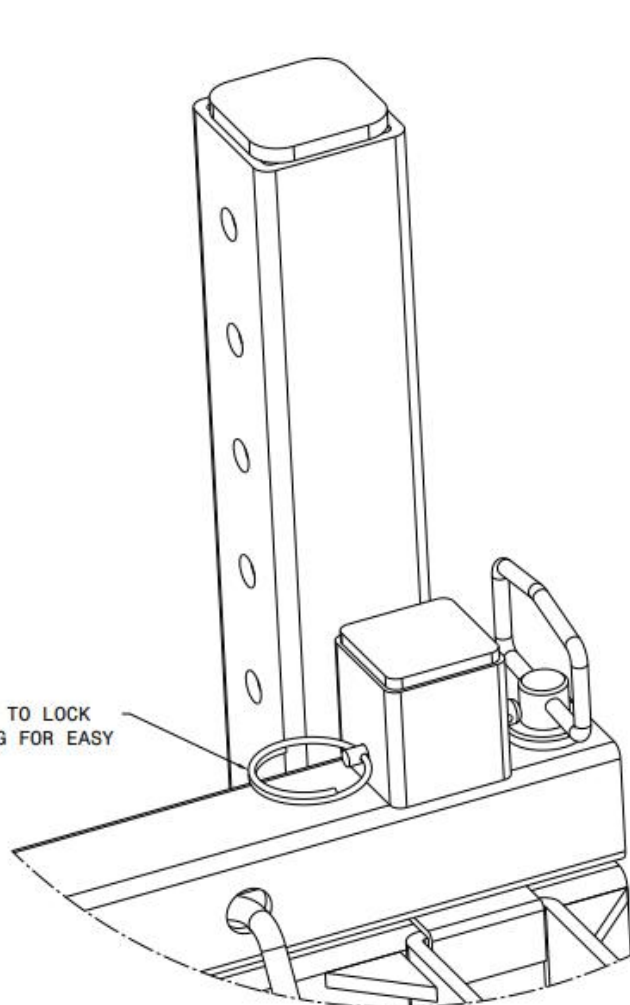